



CODESYS OPC UA PubSub SL

The library *OPC UA PubSub SL* allows for the exchange of messages via the *Pub/Sub* protocol defined by the *OPC UA Foundation*.

Product description

Communication via the *OPC UA Pub/Sub* protocol provides, in addition to the *Client/Server* communication, also a possibility to exchange data between the subscribers of a network in compliance with the rules of the *OPC UA Foundation*. The structure of the data (*DataSet*) can be freely defined and is agreed in advance between the sender and the receiver. This eliminates the need to transport additional (meta)data. The data transfer takes place with the help of the *OPC UA PubSub SL* library via *UDP/IP* according to the rules defined for *UADP*. A *Publisher* publishes its data to an unknown number of *Subscribers*. So the sender and receiver do not know each other. That is why the number of receivers also does not have any repercussions for the sender. A reply to the sender as to whether its messages have reached the receivers cannot be sent via the protocol due to the nature of the protocol. If necessary, such a reply has to be managed in an application-specific way. The data is transferred in a binary format according to the rules of the *OPC UA Foundation*. The *OPC UA PubSub SL* library takes over the conversion of IEC data types into the corresponding *OPC UA* data types and back. The implementation thereby follows the profiles below:


- *Publisher: PubSub Publisher UADP Periodic Fixed Settings*
- *Subscriber: PubSub Subscriber UADP Periodic Fixed Settings*

The message length is limited to 1500 *bytes* (MTU) (*Chunked NetworkMessages not supported*). As long as the rules for a *Time Sensitive Network* is still not available, hard real-time conditions cannot be complied with. However, the implementation of the *OPC UA PubSub SL* library attempts to keep the *jitter* as low as possible.

The following function blocks are included in the library:

- *DataSet*: Function block for the definition of a *DataSetMessage*
- *Configuration*: Function block for the management of shared resources (*Connection, Group, ...*)
- *RootDiagnostics*: Function block for superordinate diagnostic data
- *Connection*: Function block for the management of the connection to *Publisher* and *Subscriber*
- *ConnectionDiagnostics*: Function block for diagnostic data of the connection (*Connection*)
- *ReaderGroup*: Function block for the management of *Reader* function blocks (creation of a *NetworkMessage* from *DataSetMessages*)

- ReaderGroupDiagnostics: Function block for diagnostic data of a ReaderGroup
- Reader: Function block for the management of a DataSet function block (Subscriber)
- ReaderDiagnostics: Function block for diagnostic data of a Reader function block
- WriterGroup: Function block for the management of writer function blocks (creation of a NetworkMessage from DataSetMessages)
- WriterGroupDiagnostics: Function block for diagnostic data of a WriterGroup
- Writer: Function block for the management of a DataSet function block (Publisher)
- WriterDiagnostics: Function block for diagnostic data of a writer function block

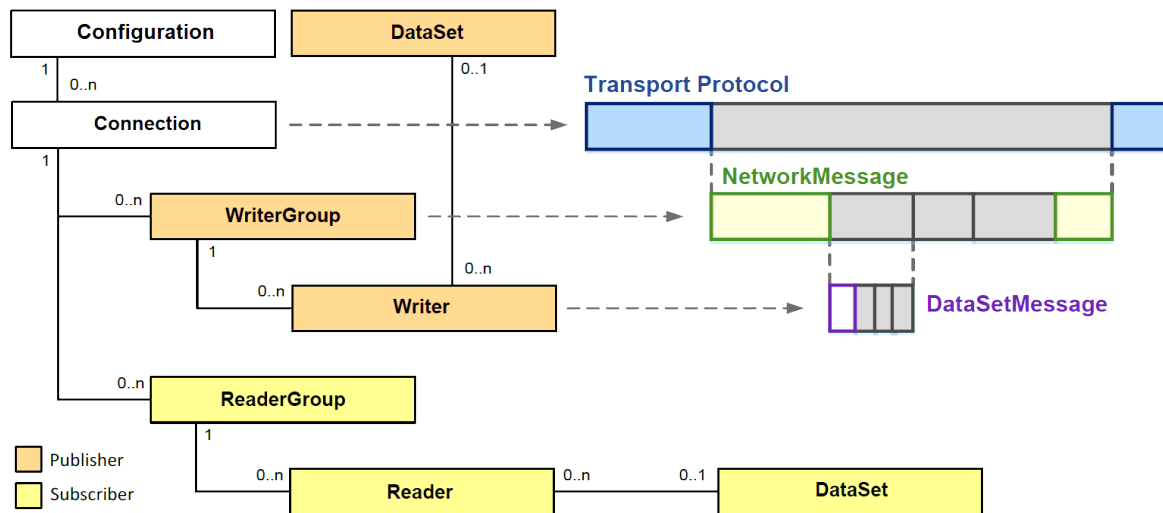

Supported functions

- Publish/Subscribe of messages according to *OPC 10000-14: OPC Unified Architecture Part 14: PubSub Release 1.04*
- Maximum size of a *NetworkMessage*: 1500
- The current packet size and *payload* can be configured by means of the configuration of the respective *ReaderGroup/WriterGroup* and *DataSet* function blocks.
- Support of a background task for the respective *Connection* function block
- The following profiles are supported:
 - *Publisher: PubSub Publisher UADP Periodic Fixed Settings*
 - *Subscriber: PubSub Subscriber UADP Periodic Fixed Settings*

General information

Supplier:

CODESYS GmbH
 Memminger Strasse 151
 87439 Kempten
 Germany

Support:

Technical support is not included with this product. To receive technical support, please purchase a CODESYS Support Ticket.

<https://support.codesys.com>

Item:

CODESYS OPC UA PubSub SL

Item number:

2311000001

Sales/Source of supply:

CODESYS Store
<https://store.codesys.com>

Included in delivery:

CODESYS Package with library, product data sheet (en, de), and CHM help

System requirements and restrictions

Development system	CODESYS Development System V3.5.17.0 or higher
Runtime	CODESYS Control V3.5.14.0 or higher
Supported platforms and devices	Note: Use the "Device Reader" project for locating the functions supported by the PLC. The Device Reader is available in the CODESYS Store free of charge.
Additional requirements	Depending on the capabilities of the respective runtime system, the messages can be sent via <i>Unicast</i> , <i>Multicast</i> , or <i>Broadcast</i> .
Restrictions	The maximum length of a <i>Networkmessage</i> is 1500 bytes. (<i>Chunked NetworkMessages not supported</i>)
Licensing	



Single device license: The license can be used on the target device/PLC on which the CODESYS runtime system is installed.

Licenses are activated on a software-based license container (soft container), which is permanently connected to the controller. Alternatively, the license can be stored on a CODESYS Key (USB dongle). By replugging the CODESYS Key, the license can be used on any other controller.

Note: Without a license, the software runs for 30 minutes demo mode. A manual restart is required after that.

Required accessories

-

Note: Technical specifications are subject to change. Errors and omissions excepted. The content of the current online version of this document applies.

Creation date: 2024-12-09